


FUSION
by GLP

Fusion Stick FS16Z



DMX Channel Index

DMX Channel Index Rev. C
Software version 1.0.0.2

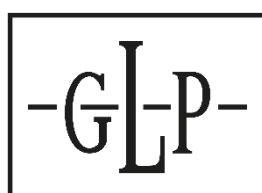

GLP® Fusion Stick FS16Z DMX Channel Index – Revision C

This document covers fixture software version 1.0.0.2

© 2018-2022 German Light Products GmbH. All rights reserved.

The marks 'GLP' and 'German Light Products' are trademarks registered as the property of German Light Products GmbH in Germany, in the United States of America and in other countries.

The information contained in this document is subject to change without notice. German Light Products GmbH and all affiliated companies disclaim liability for any injury, damage, direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document.

Manufacturer's head office:

German Light Products GmbH (GLP), Industriestrasse 2, 76307 Karlsbad, Germany
Tel (Germany): +49 7248 92719 - 0

Service & Support EMEA:

GLP, Industriestrasse 2, 76307 Karlsbad, Germany

Tel. (Germany): +49 7248 9271955

Email: support@glp.de

www.glp.de

Service & Support USA:

GLP USA, 1145 Arroyo St., Ste. A, 91340 San Fernando, California

Tel (USA): +1 818 767 8899

Support (US): info@germanlightproducts.com

www.germanlightproducts.com

Table of Contents

1.	DMX control modes overview	4
2.	DMX control channel layout.....	9
	DMX Mode 1: Standard.....	10
	DMX Mode 2: Advanced	13
	DMX Mode 3: Pixel	16
	DMX Mode 4: Compressed RGBW	18
	DMX Mode 5: Compressed Pixel	19
	Control / Settings channel	20
3.	Guide to patterns	22
	Static patterns	22
	Static patterns(continued).....	23
	Animated patterns.....	24

1. DMX control modes overview

The following DMX control modes are available in the FS16Z.

DMX Mode 1: Standard (14 channels)

provides a virtual color wheel (color presets) and RGBW color mixing. A separate Shutter channel provides strobe, pulse and ramp-up/down effects and a Master dimmer provides 16-bit control of overall intensity.

Zoom control is available, and the fixture offers color temperature control on a separate CTO channel. A wide range of pre-programmed static and animated patterns are available. The animated patterns have variable movement speed and crossfading speed.

A Control / Settings channel lets you configure the fixture remotely via DMX.

Mode 1 Standard

1	Color wheel
2	Red
3	Green
4	Blue
5	White
6	Shutter
7	Master dimmer
8	Master dimmer fine
9	Zoom
10	CTO
11	Pattern select
12	Pattern speed
13	Pattern fade
14	Control/Settings

DMX Mode 2: Advanced (33 channels)

provides a virtual color wheel (color presets) and 16-bit RGBW color mixing. A separate Shutter channel provides strobe, pulse and ramp-up/down effects and a Master dimmer provides 16-bit control of overall intensity.

Zoom control is available, and the fixture offers color temperature control on a separate CTO channel. Mode 2 offers two layers of effects, each with a wide range of pre-programmed static and animated patterns, RGBW color mixing, shutter effects and variable intensity. The animated patterns in both layers also have variable movement speed and crossfading speed.

A Control / Settings channel lets you configure the fixture remotely via DMX.

Mode 2 Advanced

1	Color wheel
2	Red
3	Red fine
4	Green
5	Green fine
6	Blue
7	Blue fine
8	White
9	White fine
10	Shutter
11	Master dimmer
12	Master dimmer fine
13	Zoom
14	CTO
15	Pattern 1 select
16	Pattern 1 speed
17	Pattern 1 fade
18	Pattern 1 Red
19	Pattern 1 Green
20	Pattern 1 Blue
21	Pattern 1 White
22	Pattern 1 shutter
23	Pattern 1 dimmer
24	Pattern 2 select
25	Pattern 2 speed
26	Pattern 2 fade
27	Pattern 2 Red
28	Pattern 2 Green
29	Pattern 2 Blue
30	Pattern 2 White
31	Pattern 2 shutter
32	Pattern 2 dimmer
33	Control/Settings

DMX Mode 3: Pixel (79 channels)

provides a virtual color wheel (color presets) and 16-bit RGBW color mixing. A separate Shutter channel provides strobe, pulse and ramp-up/down effects and a 16-bit Master dimmer channel controls overall intensity.

Zoom control is available, and the fixture offers color temperature control on a separate CTO channel.

This mode also offers individual pixel-level RGBW color mixing.

A Control / Settings channel lets you configure the fixture remotely via DMX.

Mode 3 Pixel	
1	Color wheel
2	Red
3	Red fine
4	Green
5	Green fine
6	Blue
7	Blue fine
8	White
9	White fine
10	Shutter
11	Master dimmer
12	Master dimmer fine
13	Zoom
14	CTO
15	Pixel 1 Red
16	Pixel 1 Green
17	Pixel 1 Blue
18	Pixel 1 White
19	Pixel 2 Red
20	Pixel 2 Green
21	Pixel 2 Blue
22	Pixel 2 White
...	...
...	Pixels RGBW in sequence
...	...
75	Pixel 16 Red
76	Pixel 16 Green
77	Pixel 16 Blue
78	Pixel 16 White
79	Control / Settings

DMX Mode 4: Compressed RGBW

provides the main control options: RGBW color mixing, zoom control and a Control / Settings channel that lets you configure the fixture via DMX.

Mode 4 Compressed RGBW	
1	Red
2	Green
3	Blue
4	White
5	Zoom
6	Control / Settings

DMX Mode 5: Compressed Pixel (69 channels) provides individual pixel-level RGBW color mixing, with overall intensity and shutter control.


**Mode 5
Compressed Pixel**

1	Shutter
2	Master dimmer
3	Master dimmer fine
4	Zoom
5	Control / Settings
6	Pixel 1 Red
7	Pixel 1 Green
8	Pixel 1 Blue
9	Pixel 1 White
10	Pixel 2 Red
11	Pixel 2 Green
12	Pixel 2 Blue
13	Pixel 2 White
...	...
...	... Pixels RGBW in sequence
...	...
66	Pixel 16 Red
67	Pixel 16 Green
68	Pixel 16 Blue
69	Pixel 16 White

2. DMX control channel layout

In the following DMX channel layout tables:

- Default settings are indicated with **bold type**.
- Where commands are marked with an asterisk * you must send that value continuously for 3 seconds (or other duration if indicated in the table) to apply the command.
- Where LED orientation commands are marked with two asterisks ** the direction of FX pattern *movement* is reversed compared to the similar commands available earlier on the same channel. The FX pattern *orientation* is unchanged.
- Pixel order is shown below with Pixel 1 at the end nearest the DMX/Power input and Pixel 16 at the end nearest the DMX/Power output.

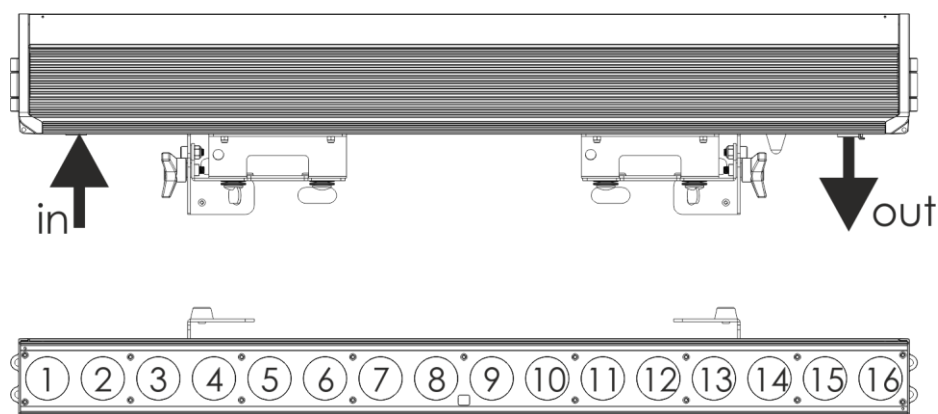

DMX Mode 1: Standard

14 DMX Channels

Channel	Command	DMX range	Percent	Default DMX	Fade
1	No function: RGBW color mixing	0-5	0-2.0%	0	Snap
	LEE 790 - Moroccan Pink	6-10	2.4-3.9%		
	LEE 157 - Pink	11-15	4.3-5.9%		
	LEE 332 - Special Rose Pink	16-20	6.3-7.8%		
	LEE 328 - Follies Pink	21-25	8.2-9.8%		
	LEE 345 - Fuchsia Pink	26-30	10.2-11.8%		
	LEE 194 - Surprise Pink	31-35	12.2-13.7%		
	LEE 181 - Congo Blue	36-40	14.1-15.7%		
	LEE 071 - Tokyo Blue	41-45	16.1-17.6%		
	LEE 120 - Deep Blue	46-50	18.0-19.6%		
	LEE 079 - Just Blue	51-55	20.0-21.6%		
	LEE 132 - Medium Blue	56-60	22.0-23.5%		
	LEE 200 - Double CT Blue	61-65	23.9-25.5%		
	LEE 161 - Slate Blue	66-70	25.9-27.5%		
	LEE 201 - Full CT Blue	71-75	27.8-29.4%		
	LEE 202 - Half CT Blue	76-80	29.8-31.4%		
	LEE 117 - Steel Blue	81-85	31.8-33.3%		
	LEE 353 - Lighter Blue	86-90	33.7-35.3%		
	LEE 118 - Light Blue	91-95	35.7-37.3%		
	LEE 116 - Medium Blue Green	96-100	37.6-39.2%		
	LEE 124 - Dark Green	101-105	39.6-41.2%		
	LEE 139 - Primary Green	106-110	41.6-43.1%		
	LEE 089 - Moss Green	111-115	43.5-45.1%		
	LEE 122 - Fern Green	116-120	45.5-47.1%		
	LEE 738 - JAS Green	121-125	47.5-49.0%		
	LEE 088 - Lime Green	126-130	49.4-51.0%		
	LEE 100 - Spring Yellow	131-135	51.4-52.9%		
	LEE 104 - Deep Amber	136-140	53.3-54.9%		
	LEE 179 - Chrome Orange	141-145	55.3-56.9%		
	LEE 105 - Orange	146-150	57.3-58.8%		
	LEE 021 - Gold Amber	151-155	59.2-60.8%		
	LEE 778 - Millennium Gold	156-160	61.2-62.7%		
	LEE 135 - Deep Golden Amber	161-165	63.1-64.7%		
	LEE 164 - Flame Red	166-170	65.1-66.7%		
	Color wheel rotation forwards fast-slow	171-185	67.1-72.5%		
	Color wheel stops at current color	186-190	72.9-74.5%		
	Color wheel rotation backwards fast-slow	191-205	74.9-80.4%		
	Color wheel stops at current color	206-210	80.8-82.4%		
	Random colors fast-slow	211-225	82.7-88.2%		
	Tungsten simulation	226-230	88.6-90.2%		
Warm white - 3200K	231-235	90.6-92.2%			
Neutral white - 4200K	236-240	92.5-94.1%			
Cool white - 5600K	241-245	94.5-96.1%			
Cool white - 7200K	246-250	96.5-98.0%			

		Cool white - 8000K	251-255	98.4-100%		
--	--	--------------------	---------	-----------	--	--

2	Red	Intensity 0-100%	0-255	0-100%	0	Fade
3	Green	Intensity 0-100%	0-255	0-100%	0	Fade
4	Blue	Intensity 0-100%	0-255	0-100%	0	Fade
5	White	Intensity 0-100%	0-255	0-100%	0	Fade
6	Shutter	Shutter closed	0-15	0-5.9%	0	Snap
		Random strobe	16-47	6.3-18.4%		
		Ramp up slow-fast	48-79	18.8-31.0%		
		Ramp down slow-fast	80-111	31.4-43.5%		
		Ramp up-down slow-fast	112-143	43.9-56.1%		
		Strobe pause 5s – 1s (slow – fast)	144-199	56.5-78.0%		
		Strobe 1Hz – 20 Hz (slow – fast)	200-239	78.4-93.7%		
		Shutter open	240-255	94.1-100%		
7	Dimmer	Intensity 0-100% (16-bit)	0-255	0-100%	0	Fade
8	Dimmer fine		0-255	0-100%	0	Fade
9	Zoom	Narrow – Wide	0-255	0-100%	0	Fade
10	CTO	Color temperature cool-warm	0-255	0-100%	0	Fade
11	Pattern selection See 'Guide to patterns' on page 22	No Pattern – all pixels lit	0-5	0-2.0%	0	Snap
		Static Patterns	6-79	2.4-3.1%		
		Animated Patterns	80-179	31.4-70.2%		
		No function	180-255	70.6-100%		
12	Pattern speed	Pattern speed slow-fast	0-255	0-100%	0	Fade
13	Pattern fade	Pattern intensity 0-100%	0-255	0-100%	0	Fade
14	Control / Settings	See 'Control / Settings channel' on page 20.				

DMX Mode 2: Advanced**33 DMX Channels**

Channel	Command	DMX range	Percent	Default DMX	Fade	
1	Color wheel	No function: RGBW color mixing	0-5	0-2.0%	0	Snap
		LEE 790 - Moroccan Pink	6-10	2.4-3.9%		
		LEE 157 - Pink	11-15	4.3-5.9%		
		LEE 332 - Special Rose Pink	16-20	6.3-7.8%		
		LEE 328 - Follies Pink	21-25	8.2-9.8%		
		LEE 345 - Fuchsia Pink	26-30	10.2-11.8%		
		LEE 194 - Surprise Pink	31-35	12.2-13.7%		
		LEE 181 - Congo Blue	36-40	14.1-15.7%		
		LEE 071 - Tokyo Blue	41-45	16.1-17.6%		
		LEE 120 - Deep Blue	46-50	18.0-19.6%		
		LEE 079 - Just Blue	51-55	20.0-21.6%		
		LEE 132 - Medium Blue	56-60	22.0-23.5%		
		LEE 200 - Double CT Blue	61-65	23.9-25.5%		
		LEE 161 - Slate Blue	66-70	25.9-27.5%		
		LEE 201 - Full CT Blue	71-75	27.8-29.4%		
		LEE 202 - Half CT Blue	76-80	29.8-31.4%		
		LEE 117 - Steel Blue	81-85	31.8-33.3%		
		LEE 353 - Lighter Blue	86-90	33.7-35.3%		
		LEE 118 - Light Blue	91-95	35.7-37.3%		
		LEE 116 - Medium Blue Green	96-100	37.6-39.2%		
		LEE 124 - Dark Green	101-105	39.6-41.2%		
		LEE 139 - Primary Green	106-110	41.6-43.1%		
		LEE 089 - Moss Green	111-115	43.5-45.1%		
		LEE 122 - Fern Green	116-120	45.5-47.1%		
		LEE 738 - JAS Green	121-125	47.5-49.0%		
		LEE 088 - Lime Green	126-130	49.4-51.0%		
		LEE 100 - Spring Yellow	131-135	51.4-52.9%		
		LEE 104 - Deep Amber	136-140	53.3-54.9%		
		LEE 179 - Chrome Orange	141-145	55.3-56.9%		
		LEE 105 - Orange	146-150	57.3-58.8%		
		LEE 021 - Gold Amber	151-155	59.2-60.8%		
		LEE 778 - Millennium Gold	156-160	61.2-62.7%		
		LEE 135 - Deep Golden Amber	161-165	63.1-64.7%		
LEE 164 - Flame Red	166-170	65.1-66.7%				
Color wheel rotation forwards fast-slow	171-185	67.1-72.5%				
Color wheel stops at current color	186-190	72.9-74.5%				
Color wheel rotation backwards fast-slow	191-205	74.9-80.4%				
Color wheel stops at current color	206-210	80.8-82.4%				
Random colors fast-slow	211-225	82.7-88.2%				
Tungsten simulation	226-230	88.6-90.2%				
Warm white - 3200K	231-235	90.6-92.2%				
Neutral white - 4200K	236-240	92.5-94.1%				
Cool white - 5600K	241-245	94.5-96.1%				

		Cool white - 7200K	246-250	96.5-98.0%		
		Cool white - 8000K	251-255	98.4-100%		
2	Red	Intensity 0-100% (16-bit)	0-255	0-100%	0	Fade
3	Red fine		0-255	0-100%	0	Fade
4	Green	Intensity 0-100% (16-bit)	0-255	0-100%	0	Fade
5	Green fine		0-255	0-100%	0	Fade
6	Blue	Intensity 0-100% (16-bit)	0-255	0-100%	0	Fade
7	Blue fine		0-255	0-100%	0	Fade
8	White	Intensity 0-100% (16-bit)	0-255	0-100%	0	Fade
9	White fine		0-255	0-100%	0	Fade
10	Shutter	Shutter closed	0-15	0-5.9%	0	Snap
		Random strobe	16-47	6.3-18.4%		
		Ramp up slow-fast	48-79	18.8-31.0%		
		Ramp down slow-fast	80-111	31.4-43.5%		
		Ramp up-down slow-fast	112-143	43.9-56.1%		
		Strobe pause 5s – 1s (slow – fast)	144-199	56.5-78.0%		
		Strobe 1Hz – 20 Hz (slow – fast)	200-239	78.4-93.7%		
Shutter open	240-255	94.1-100%				
11	Dimmer	Master intensity 0-100% (16-bit)	0-255	0-100%	0	Fade
12	Dimmer fine		0-255	0-100%	0	Fade
13	Zoom	Narrow – Wide	0-255	0-100%	0	Fade
14	CTO	Color temperature cool-warm	0-255	0-100%	0	Fade
15	Pattern 1 selection See 'Guide to patterns' on page 22	No Pattern – all pixels lit	0-5	0-2.0%	0	Snap
		Static Patterns	6-79	2.4-3.1%		
		Animated Patterns	80-179	31.4-70.2%		
		No function	180-255	70.6-100%		
16	Pattern 1 speed	Pattern 1 speed slow-fast	0-255	0-100%	0	Fade
17	Pattern 1 fade	Pattern 1 intensity 0-100%	0-255	0-100%	0	Fade
18	Pattern 1 Red	Intensity 0-100%	0-255	0-100%	0	Fade
19	Pattern 1 Green	Intensity 0-100%	0-255	0-100%	0	Fade
20	Pattern 1 Blue	Intensity 0-100%	0-255	0-100%	0	Fade
21	Pattern 1 White	Intensity 0-100%	0-255	0-100%	0	Fade
22	Pattern 1 Shutter	Shutter closed	0-15	0-5.9%	0	Snap
		Random strobe	16-47	6.3-18.4%		
		Ramp up slow-fast	48-79	18.8-31.0%		
		Ramp down slow-fast	80-111	31.4-43.5%		
		Ramp up-down slow-fast	112-143	43.9-56.1%		
		Strobe pause 5s – 1s (slow – fast)	144-199	56.5-78.0%		
		Strobe 1Hz – 20 Hz (slow – fast)	200-239	78.4-93.7%		
Shutter open	240-255	94.1-100%				
23	Pattern 1 Dimmer	Intensity 0-100%	0-255	0-100%	0	Fade
24	Pattern 2 selection See 'Guide to patterns' on page 22	No Pattern – all pixels lit	0-5	0-2.0%	0	Snap
		Static Patterns	6-79	2.4-3.1%		
		Animated Patterns	80-179	31.4-70.2%		
		No function	180-255	70.6-100%		
25	Pattern 2 speed	Pattern 2 speed slow-fast	0-255	0-100%	0	Fade
26	Pattern 2 fade	Pattern 2 intensity 0-100%	0-255	0-100%	0	Fade
27	Pattern 2 Red	Intensity 0-100%	0-255	0-100%	0	Fade
28	Pattern 2 Green	Intensity 0-100%	0-255	0-100%	0	Fade
29	Pattern 2 Blue	Intensity 0-100%	0-255	0-100%	0	Fade
30	Pattern 2 White	Intensity 0-100%	0-255	0-100%	0	Fade

31	Pattern 2 Shutter	Shutter closed	0-15	0-5.9%	0	Snap
		Random strobe	16-47	6.3-18.4%		
		Ramp up slow-fast	48-79	18.8-31.0%		
		Ramp down slow-fast	80-111	31.4-43.5%		
		Ramp up-down slow-fast	112-143	43.9-56.1%		
		Strobe pause 5s – 1s (slow – fast)	144-199	56.5-78.0%		
		Strobe 1Hz – 20 Hz (slow – fast)	200-239	78.4-93.7%		
		Shutter open	240-255	94.1-100%		
32	Pattern 2 Dimmer	Intensity 0-100%	0-255	0-100%	0	Fade
33	Control / Settings	See 'Control / Settings channel' on page 20.				

DMX Mode 3: Pixel

79 DMX Channels

Channel	Command	DMX range	Percent	Default DMX	Fade
1	No function: RGBW color mixing	0-5	0-2.0%	0	Snap
	LEE 790 - Moroccan Pink	6-10	2.4-3.9%		
	LEE 157 - Pink	11-15	4.3-5.9%		
	LEE 332 - Special Rose Pink	16-20	6.3-7.8%		
	LEE 328 - Follies Pink	21-25	8.2-9.8%		
	LEE 345 - Fuchsia Pink	26-30	10.2-11.8%		
	LEE 194 - Surprise Pink	31-35	12.2-13.7%		
	LEE 181 - Congo Blue	36-40	14.1-15.7%		
	LEE 071 - Tokyo Blue	41-45	16.1-17.6%		
	LEE 120 - Deep Blue	46-50	18.0-19.6%		
	LEE 079 - Just Blue	51-55	20.0-21.6%		
	LEE 132 - Medium Blue	56-60	22.0-23.5%		
	LEE 200 - Double CT Blue	61-65	23.9-25.5%		
	LEE 161 - Slate Blue	66-70	25.9-27.5%		
	LEE 201 - Full CT Blue	71-75	27.8-29.4%		
	LEE 202 - Half CT Blue	76-80	29.8-31.4%		
	LEE 117 - Steel Blue	81-85	31.8-33.3%		
	LEE 353 - Lighter Blue	86-90	33.7-35.3%		
	LEE 118 - Light Blue	91-95	35.7-37.3%		
	LEE 116 - Medium Blue Green	96-100	37.6-39.2%		
	LEE 124 - Dark Green	101-105	39.6-41.2%		
	LEE 139 - Primary Green	106-110	41.6-43.1%		
	LEE 089 - Moss Green	111-115	43.5-45.1%		
	LEE 122 - Fern Green	116-120	45.5-47.1%		
	LEE 738 - JAS Green	121-125	47.5-49.0%		
	LEE 088 - Lime Green	126-130	49.4-51.0%		
	LEE 100 - Spring Yellow	131-135	51.4-52.9%		
	LEE 104 - Deep Amber	136-140	53.3-54.9%		
	LEE 179 - Chrome Orange	141-145	55.3-56.9%		
	LEE 105 - Orange	146-150	57.3-58.8%		
	LEE 021 - Gold Amber	151-155	59.2-60.8%		
	LEE 778 - Millennium Gold	156-160	61.2-62.7%		
	LEE 135 - Deep Golden Amber	161-165	63.1-64.7%		
	LEE 164 - Flame Red	166-170	65.1-66.7%		
	Color wheel rotation forwards fast-slow	171-185	67.1-72.5%		
	Color wheel stops at current color	186-190	72.9-74.5%		
	Color wheel rotation backwards fast-slow	191-205	74.9-80.4%		
	Color wheel stops at current color	206-210	80.8-82.4%		
	Random colors fast-slow	211-225	82.7-88.2%		
	Tungsten simulation	226-230	88.6-90.2%		
Warm white - 3200K	231-235	90.6-92.2%			
Neutral white - 4200K	236-240	92.5-94.1%			
Cool white - 5600K	241-245	94.5-96.1%			

		Cool white - 7200K	246-250	96.5-98.0%		
		Cool white - 8000K	251-255	98.4-100%		
2	Red	Intensity 0-100% (16-bit)	0-255	0-100%	0	Fade
3	Red fine		0-255	0-100%	0	Fade
4	Green	Intensity 0-100% (16-bit)	0-255	0-100%	0	Fade
5	Green fine		0-255	0-100%	0	Fade
6	Blue	Intensity 0-100% (16-bit)	0-255	0-100%	0	Fade
7	Blue fine		0-255	0-100%	0	Fade
8	White	Intensity 0-100% (16-bit)	0-255	0-100%	0	Fade
9	White fine		0-255	0-100%	0	Fade
10	Shutter	Shutter closed	0-15	0-5.9%	0	Snap
		Random strobe	16-47	6.3-18.4%		
		Ramp up slow-fast	48-79	18.8-31.0%		
		Ramp down slow-fast	80-111	31.4-43.5%		
		Ramp up-down slow-fast	112-143	43.9-56.1%		
		Strobe pause 5s – 1s (slow – fast)	144-199	56.5-78.0%		
		Strobe 1Hz – 20 Hz (slow – fast)	200-239	78.4-93.7%		
	Shutter open	240-255	94.1-100%			
11	Dimmer	Master intensity 0-100% (16-bit)	0-255	0-100%	0	Fade
12	Dimmer fine		0-255	0-100%	0	Fade
13	Zoom	Narrow – Wide	0-255	0-100%	0	Fade
14	CTO	Color temperature cool-warm	0-255	0-100%	0	Fade
15	Red Pixel 1	Intensity 0-100%	0-255	0-100%	0	Fade
16	Green Pixel 1	Intensity 0-100%	0-255	0-100%	0	Fade
17	Blue Pixel 1	Intensity 0-100%	0-255	0-100%	0	Fade
18	White Pixel 1	Intensity 0-100%	0-255	0-100%	0	Fade
19	Red Pixel 2	Intensity 0-100%	0-255	0-100%	0	Fade
20	Green Pixel 2	Intensity 0-100%	0-255	0-100%	0	Fade
21	Blue Pixel 2	Intensity 0-100%	0-255	0-100%	0	Fade
22	White Pixel 2	Intensity 0-100%	0-255	0-100%	0	Fade
23	Red Pixel 3	Intensity 0-100%	0-255	0-100%	0	Fade
...				
74	White Pixel 15	Intensity 0-100%				
75	Red Pixel 16	Intensity 0-100%	0-255	0-100%	0	Fade
76	Green Pixel 16	Intensity 0-100%	0-255	0-100%	0	Fade
77	Blue Pixel 16	Intensity 0-100%	0-255	0-100%	0	Fade
78	White Pixel 16	Intensity 0-100%	0-255	0-100%	0	Fade
79	Control / Settings	See 'Control / Settings channel' on page 20.				

DMX Mode 4: Compressed RGBW

6 DMX Channels

Channel	Command	DMX range	Percent	Default DMX	Fade	
1	Red	Intensity 0-100%	0-255	0-100%	0	Fade
2	Green	Intensity 0-100%	0-255	0-100%	0	Fade
3	Blue	Intensity 0-100%	0-255	0-100%	0	Fade
4	White	Intensity 0-100%	0-255	0-100%	0	Fade
5	Zoom	Shutter closed	0-15	0-5.9%	0	Snap
		Random strobe	16-47	6.3-18.4%		
		Ramp up slow-fast	48-79	18.8-31.0%		
		Ramp down slow-fast	80-111	31.4-43.5%		
		Ramp up-down slow-fast	112-143	43.9-56.1%		
		Strobe pause 5s – 1s (slow – fast)	144-199	56.5-78.0%		
		Strobe 1Hz – 20 Hz (slow – fast)	200-239	78.4-93.7%		
Shutter open	240-255	94.1-100%				
6	Control / Settings	See 'Control / Settings channel' on page 20.				

DMX Mode 5: Compressed Pixel

69 DMX Channels

Channel	Command	DMX range	Percent	Default DMX	Fade	
1	Shutter	Shutter closed	0-15	0-5.9%	0	Snap
		Random strobe	16-47	6.3-18.4%		
		Ramp up slow-fast	48-79	18.8-31.0%		
		Ramp down slow-fast	80-111	31.4-43.5%		
		Ramp up-down slow-fast	112-143	43.9-56.1%		
		Strobe pause 5s – 1s (slow – fast)	144-199	56.5-78.0%		
		Strobe 1Hz – 20 Hz (slow – fast)	200-239	78.4-93.7%		
	Shutter open	240-255	94.1-100%			
2	Dimmer	Master intensity 0-100% (16-bit)	0-255	0-100%	0	Fade
3	Dimmer fine		0-255	0-100%	0	Fade
4	Zoom	Narrow – Wide	0-255	0-100%	0	Fade
5	Control / Settings	See 'Control / Settings channel' on page 20.				
6	Red Pixel 1	Intensity 0-100%	0-255	0-100%	0	Fade
7	Green Pixel 1	Intensity 0-100%	0-255	0-100%	0	Fade
8	Blue Pixel 1	Intensity 0-100%	0-255	0-100%	0	Fade
9	White Pixel 1	Intensity 0-100%	0-255	0-100%	0	Fade
10	Red Pixel 2	Intensity 0-100%	0-255	0-100%	0	Fade
11	Green Pixel 2	Intensity 0-100%	0-255	0-100%	0	Fade
12	Blue Pixel 2	Intensity 0-100%	0-255	0-100%	0	Fade
13	White Pixel 2	Intensity 0-100%	0-255	0-100%	0	Fade
14	Red Pixel 3	Intensity 0-100%	0-255	0-100%	0	Fade
...				
65	White Pixel 15	Intensity 0-100%				
66	Red Pixel 16	Intensity 0-100%	0-255	0-100%	0	Fade
67	Green Pixel 16	Intensity 0-100%	0-255	0-100%	0	Fade
68	Blue Pixel 16	Intensity 0-100%	0-255	0-100%	0	Fade
69	White Pixel 16	Intensity 0-100%	0-255	0-100%	0	Fade

Control / Settings channel

Control / Settings					
Control / Settings	No function	0-55	0-21.6%	0	Snap
	Dimmer speed smooth*	56-60	22.0-23.5%		
	Dimmer speed fast*	61-65	23.9-25.5%		
	No function	66-70	25.9-27.5%		
	Dimming curve Linear*	71-75	27.8-29.4%		
	Dimming curve Theatrical*	76-80	29.8-31.4%		
	Dimming curve Square Law*	81-85	31.8-33.3%		
	Dimming curve Inverse Square Law*	86-90	33.7-35.3%		
	No Function	91-95	35.7-37.3%		
	No DMX = Hold scene*	96-100	37.6-39.2%		
	No DMX = Blackout*	101-105	39.6-41.2%		
	No DMX = Play Program 1*	106-110	41.6-43.1%		
	No Function	111-115	43.5-45.1%		
	Display backlight On*	116-120	45.5-47.1%		
	Display backlight Off*	121-125	47.5-49.0%		
	No Function	126-135	49.4-52.9%		
	DMX Mode: Standard*	136-140	53.3-54.9%		
	DMX Mode: Advanced*	141-145	55.3-56.9%		
	DMX Mode: Pixel*	146-150	57.3-58.8%		
	DMX Mode: Compressed RGBW*	151-155	59.2-60.8%		
	DMX Mode: Compressed Pixel*	156-160	61.2-62.8%		
	No function	161-175	63.1-68.6%		
	Zoom reset	176-180	69.0-70.6%		
	Fixture reset	181-185	71.0-72.5%		
	Factory default settings (except DMX address and DMX Mode)*	186-190	72.9-74.5%		
	No function	191-200	74.9-78.4%		
	PWM Rate: 600 Hz	201-205	78.8-80.4%		
	PWM Rate: 1200 Hz	206-210	80.8-82.4%		
	PWM Rate: 2000 Hz	211-215	82.7-84.3%		
	PWM Rate: 2400 Hz	216-220	84.7-86.3%		
	PWM Rate: 6000 Hz	221-225	86.7-88.2%		
	No function	226-230	88.6-90.2%		
	Reverse LED : Off	231-235	90.6-92.2%		
	Reverse LED : On	236-240	92.5-94.1%		
Zoom Invert : Off	241-245	94.5-96.1%			
Zoom Invert : On	246-250	96.5-98.0%			
No function	251-255	98.4-100%			

3. Guide to patterns

The pixel patterns are shown below (when using suitable DMX mode). DMX input on the left.

Static patterns

Value	Pattern	Value	Pattern
000 – 005		036	
006		037	
007		038	
008		039	
009		040	
010		041	
011		042	
012		043	
013		044	
014		045	
015		046	
016		046	
017		048	
018		049	
019		050	
020		051	
021		052	
022		053	
023		054	
024		055	
025		056	
026		057	
027		058	
028		059	
029		060	
030		061	
031		062	
032		063	
033		064	
034		065	
035			

Static patterns(continued)

Value	Pattern
066	○●●●●●●●●●●○●●●●●●●●
067	●○●●●●●●●●●○●●●●●●●●
068	●●○●●●●●●●●○●●●●●●●●
069	●●●○●●●●●●●●●○●●●●●●●●
070	●●●●○●●●●●●●●●○●●●●●●●●
071	●●●●●○●●●●●●●●●○●●●●●●●●
072	●●●●●●○●●●●●●●●●○●●●●●●●●
073	●●●●●●●○●●●●●●●●●○●●●●●●●●
074	○●○●●○●○●●○●○●●○●○●●○●○●●
075	●●○●○●●○●○●○●○●○●○●○●○●○●○
076	○●○●○●●●○●○●○●○●○●○●○●○●○●○
077	●●●●○●○●○●○●○●○●○●○●○●○●○●○
078-079	●●●●●●●●●●●●●●●●●●●●●●●●●●●●

Value	Pattern
080	
081	
082	
083	
<hr/>	
084	
085	
086	
087	
<hr/>	
088	
089	
090	
091	

Value	Pattern
092	
093	
094	
095	
<hr/>	
096	
097	
98	
099	
<hr/>	
100	
101	
102	
103	
<hr/>	
104	
105	
106	
107	
<hr/>	
108	
109	
110	
111	
<hr/>	
112	
113	
114	
115	
<hr/>	
116	
117	
118	
119	

Value	Pattern
120	
121	
122	
123	
<hr/>	
124	
125	
126	
127	
<hr/>	
128	
129	
130	
131	
<hr/>	
132	
133	
134	
135	

Value	Pattern	Value	Pattern	Value	Pattern
				148	
				149	
				150	
				151	
				152	
		140		153	
		141		154	
		142		155	
		143		156	
				158	
				158	
				159	
136				160	Random 1 Pixel
137				161	
138				162	Random 2 Pixel
139				163	
				164	Random 3 Pixel
				165	
				166	Random 4 Pixel
				167	
				168	Random 5 Pixel
				169	
		144		170	Random 6 Pixel
		145		171	
		146		172	Random 7 Pixel
		147		173	
				174	Random 8 Pixel
				175	
				176	Random 9 Pixel
				177	
				178	Random 10 Pixel
				179	
				180-255	Reserved

-GLP-