




KNV Arc
Art.No.: 7780A

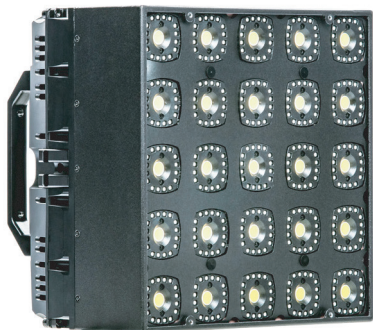

KNV Cube
Art.No.: 7780C

KNV SYSTEM

KNV CUBE & ARC

LIGHT SOURCE

Power Pixel 1 x 30 W Hyper White
16 x 0.5 W RGB

Power Pixel
count 25 (5 x 5)

CONTROL

Control Modes Normal, Compressed,
Pixel-Mapping

Display illuminated graphic
LCD, self charging
buffer battery,
backlit buttons

Protocol USITT DMX-512
ArtNET

Cooling temperature con-
trolled, overheating
protection

CONNECTORS

Signal
connection etherCON In/Out

Power Input powerCON TRUE1
In/Out

OPERATING CONDITIONS

Mains voltage 100 – 240 VAC
/ 50 – 60Hz

Power
(Watt @ 230V) 750 W

Max. ambient
temperature 40 °C / 104 °F

Operating
Position any

IP Rating 54

EEC A

EEL 0.218

Ec (kWh/1.000h) 742

INSTALLATION

Mounting KNV Connector,
KNV Yoke

HOUSING COLORS

Standard color black

DIMENSIONS & WEIGHT

Length 250 mm / 9.8 in

Width 250 mm / 9.8 in

Height
(head vertical) 250 mm / 9.8 in

Weight 9.3 kg / 20.5 lbs